

INDICATOR PANEL UV-810 SERIES

Features

- Maximum 15 V3 indicator units install available
- Wide variety of input power sources and external output



- | | | | |
|------------------------------------|--------------------------------------|---|--|
| Energy Industry | Petrochemical Plant | Steel Industry | Semiconductor Fab |
| Civil Engineering and Construction | Environment | Electrical Equipment, Machinery, and Various Manufacturing Industries | Government, Schools, and Research Institutions |
| Transportation and Communications | Agriculture and Livestock Industries | Detection inside Boilers and Furnaces | Maintenance, Service, etc. |



UV-810




UVB-810

Specifications

Model	UV-810/UVB-810 *
Number of Indicator Units	Up to 15 points (line up: 3/6/9/12/15 point type) *
External Outputs	Terminal for collective alarm • Alarm1, Alarm2, Fault • Energised/de-energised & latching, non-latching *Collective alarm contacts of 1st alarm and 2nd alarm can be changed to 1b contact (need to specify) Terminal for individual alarm • Alarm1, Alarm2, Fault Analog output • Gas concentration analog output signal: 4-20 mA, selectable from 1-5 V (need to specify)
Power Supply	AC specification: 100-240 VAC ±10% DC specification: 24 VDC ±10% (need to specify)
Operating Temperature	-10 to +40 °C (excluding rapid temperature change)
Operating Humidity	10 to 90 %RH (excluding rapid temperature change, non-condensing)
Weight	UV-810=5.5-13.5 kg UVB-810=8.0-16 kg (depends on the number of units)

* Including backup battery (Up to 6 points)

External Dimensions

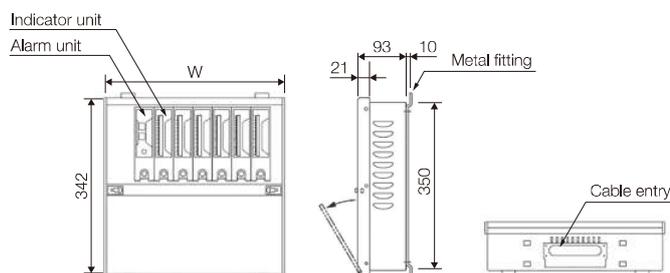

	Mounting Points	Dimensions of W (mm)
UV-810	3	236
	6	350
	9	526
	12	640
UVB-810	15	814
	3	414
	6	642

Your Authorized New Cosmos Distributor:

Minerva Industrial & Trading Pte Ltd
 T: 6848 5155
 E: sales@minerva-intra.com
 W: www.minerva-intra.com.sg